



TECHNICAL DATA

HOSE GLOBE VALVE BRONZE - 5K/10K/16K

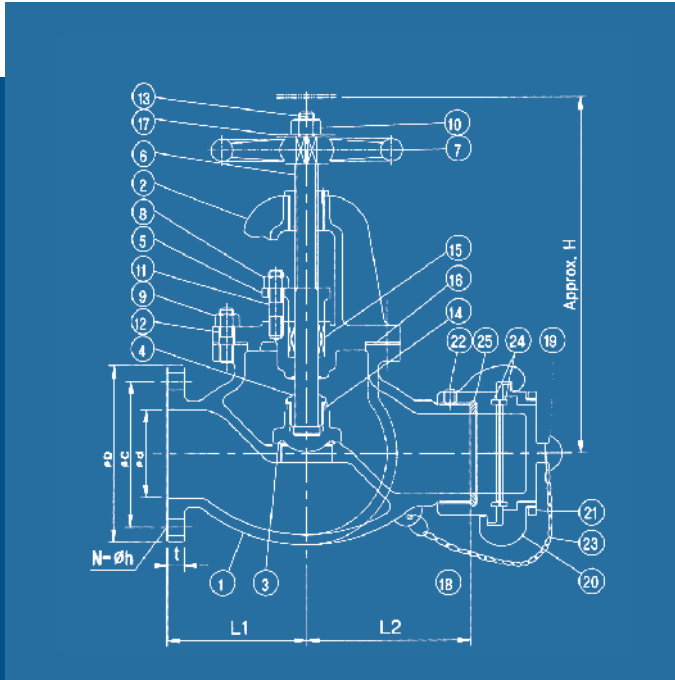

TECHNICAL FEATURES

- | | | |
|----|------------------|----------------|
| 1 | body | bronze |
| 2 | bonnet | bronze |
| 3 | disc | bronze |
| 4 | disc nut | brass |
| 5 | packing gland | brass |
| 6 | stem | brass |
| 7 | handwheel | cast iron |
| 8 | hexagon nut | brass / ss |
| 9 | hexagon nut | brass / ss |
| 10 | hexagon nut | brass / ss |
| 11 | stud bolt | brass |
| 12 | stud bolt | brass |
| 13 | split pin | brass |
| 14 | disc lock washer | brass |
| 15 | packing | non asbestos |
| 16 | gasket | non asbestos |
| 17 | washer | steel |
| 18 | base connection | bronze |
| 19 | cap | bronze |
| 20 | coupling ring | bronze |
| 21 | set ring | bronze |
| 22 | set screw | brass |
| 23 | chain | stainless wire |
| 24 | gasket | rubber |
| 25 | gasket | non asbestos |

FLUID CONDITION & MAX. WORKING PRESSURE

Rating Fluid Condition	JIS 5K	JIS 10K/16K
steam up to 205 °C	-	-
air, gas, oil and pulsation water	0.49(5)	0.98(10)
non-shock water up to 120 °C	0.69(7)	1.37(14)

DIMENSIONS

Rating	size (mm)	Ød (mm)	ØD (mm)	ØC (mm)	N-Øh (mm)	t (mm)	L1 (mm)	L (mm)	L (mm)	H (mm)	Weight (kg)	Weight (kg)
JIS 5K	50A	50	130	105	4-15	14	105	100	255	225	12.9	11.0
(JIS F7334)	65A	65	155	130	4-15	18	135	130	295	255	27.8	23.0
JIS 10K	50A	50	155	120	4-19	16	110	120	270	240	15.4	14.3
(JIS F7334)	65A	65	175	140	4-19	18	135	130	295	255	27.8	23.0
JIS 16K	50A	50	155	120	8-19	16	110	120	270	240	15.4	14.3
(JIS F7334)	65A	65	175	140	8-19	18	135	130	295	255	27.8	23.0