


TECHNICAL DATA

HOSE ANGLE VALVE BRONZE - 10K

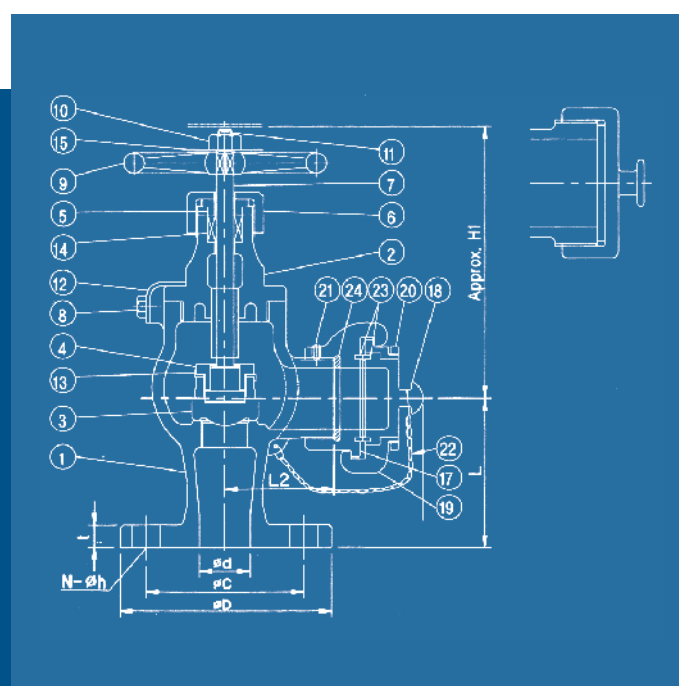

FLUID CONDITION & MAX. WORKING PRESSURE

Rating	Fluid Condition	JIS 10K
	steam up to 205 °C	-
	air, gas, oil and pulsation water	0.98(10)
	non-shock water up to 120 °C	1.37(14)

DIMENSIONS

Rating	size (mm)	Ød (mm)	ØD (mm)	ØC (mm)	N-Øh (mm)	t (mm)	L1 (mm)	L (mm)	L (mm)	H (mm)	Weight (kg)	Weight (kg)
JIS 10K	15A	15	95	70	4-15	12	73.0	70	130	120	2.76	2.72
(JIS F7334)	20A	20	100	75	4-15	14	83.0	85	160	145	4.15	4.04
	25A	25	125	90	4-19	14	83.0	85	160	145	4.15	4.0
	32A	32	135	100	4-19	16	140.0	100	190	165	8.43	8.19
	40A	40	140	105	4-19	16	140.0	100	190	165	8.43	8.19

TECHNICAL FEATURES

1	body	bronze
2	bonnet	bronze / brass
3	disc	bronze / brass
4	disc nut	brass
5	packing gland	brass
6	gland nut	brass
7	stem	brass
8	machine screw	brass
9	handwheel	cast iron
10	hexagon nut	brass
11	split pin	brass
12	bonnet lock	plate brass
13	disc lock washer	brass
14	packing washer	non asbestos
15	washer	steel
17	base connection	bronze
18	cap	bronze
19	coupling ring	bronze
20	set ring	bronze
21	set screw	steel
22	chain	stainless wire
23	gasket	rubber
24	gasket	non asbestos

(NAKAJIMA COUPLING)
40A to 65A