


TECHNICAL DATA

HOSE ANGLE VALVE BRONZE - 5K

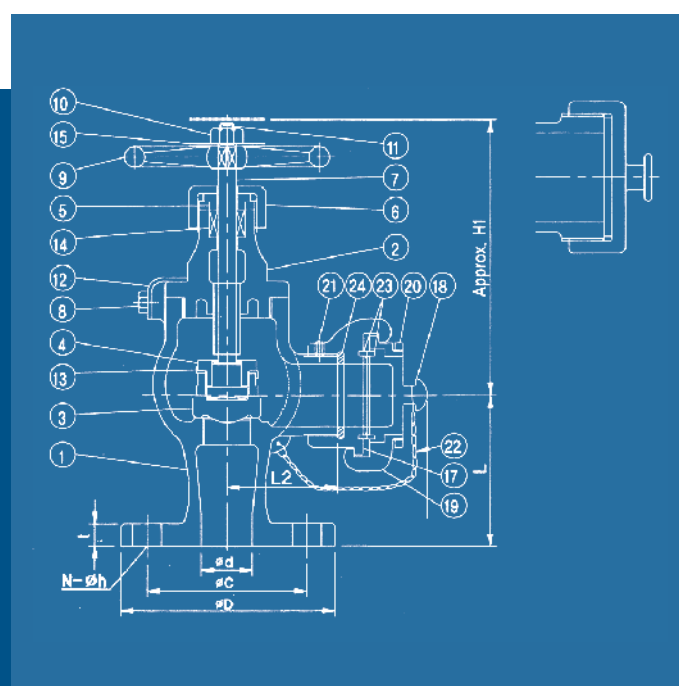

FLUID CONDITION & MAX. WORKING PRESSURE

Rating	Fluid Condition	JIS 5K
	steam up to 205 °C	-
	air, gas, oil and pulsation water	0.49(5)
	non-shock water up to 120 °C	0.69(7)

DIMENSIONS

Rating	size (mm)	Ød (mm)	ØD (mm)	ØC (mm)	N-Øh (mm)	t (mm)	L1 (mm)	L (mm)	L (mm)	H (mm)	Weight (kg)	Weight (kg)
JIS 5K	15A	15	80	60	4-12	9	73.0	55	130	120	2.51	2.41
(JIS F7334)	20A	20	85	65	4-12	10	78.0	65	160	145	3.55	3.4
	25A	25	95	75	4-12	10	78.0	65	160	145	3.55	3.44
	32A	32	115	90	4-15	12	128.5	85	190	165	6.26	5.91
	40A	40	120	95	4-15	12	128.5	85	190	165	6.26	5.91

TECHNICAL FEATURES

1	body	bronze
2	bonnet	bronze / brass
3	disc	bronze / brass
4	disc nut	brass
5	packing gland	brass
6	gland nut	brass
7	stem	brass
8	machine screw	brass
9	handwheel	cast iron
10	hexagon nut	brass
11	split pin	brass
12	bonnet lock	plate brass
13	disc lock washer	brass
14	packing washer	non asbestos
15	washer	steel
17	base connection	bronze
18	cap	bronze
19	coupling ring	bronze
20	set ring	bronze
21	set screw	steel
22	chain	stainless wire
23	gasket	rubber
24	gasket	non asbestos

(NAKAJIMA COUPLING)
40A to 65A