
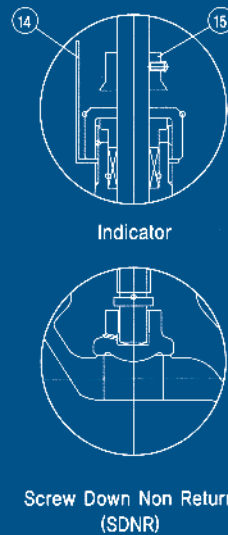


TECHNICAL DATA

GLOBE VALVE (UNION BONNET TYPE) BRONZE - 16K

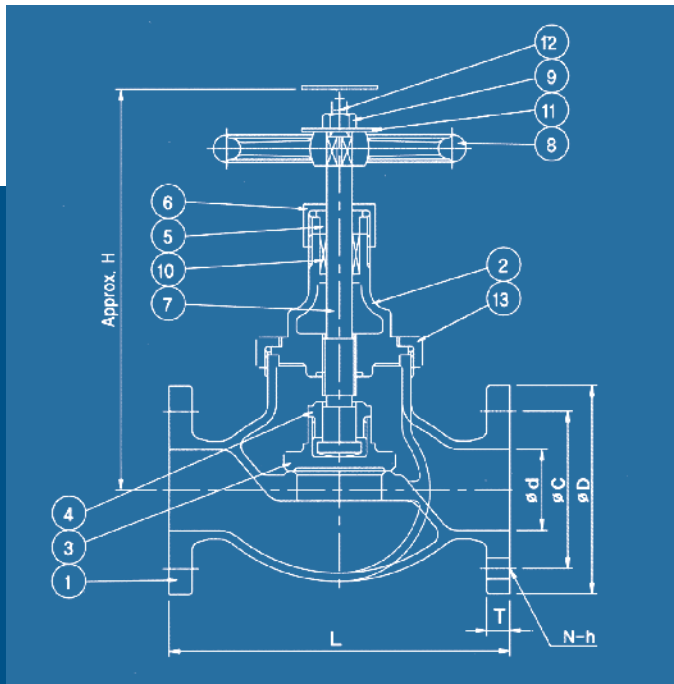

TECHNICAL FEATURES

- | | | |
|-----------|-----------------|----------------|
| 1 | body | bronze |
| 2 | bonnet | bronze / brass |
| 3 | disc | brass |
| 4 | disc nut | brass |
| 5 | packing gland | brass |
| 6 | gland nut | brass |
| 7 | stem | brass |
| 8 | handwheel | cast iron |
| 9 | handle nut | steel |
| 10 | packing | non asbestos |
| 11 | washer | steel |
| 12 | split pin | brass |
| 13 | bonnet nut | bronze |
| 14 | indicator plate | brass |
| 15 | indicator piece | brass |

FLUID CONDITION & MAX. WORKING PRESSURE

| Rating | Fluid Condition | JIS 16K |
|--------|-----------------------------------|----------|
| | Steam up to 205°C | 1.57(16) |
| | Air, Gas, Oil and Pulsation Water | 1.57(16) |
| | Non-shock water up to 120 °C | 2.16(22) |

DIMENSIONS

| Rating | size (mm) | Ød (mm) | ØD (mm) | ØC (mm) | N-Øh (mm) | t (mm) | L (mm) | H (mm) | Weight (kg) |
|-------------|-----------|---------|---------|---------|-----------|--------|--------|--------|-------------|
| JIS 16K | 15A | 15 | 95 | 70 | 4-15 | 12 | 110 | 155 | 2.96 |
| (JIS F7348) | 20A | 20 | 100 | 75 | 4-15 | 14 | 120 | 165 | 3.92 |
| | 25A | 25 | 125 | 90 | 4-19 | 14 | 130 | 185 | 5.65 |
| | 32A | 32 | 135 | 100 | 4-19 | 16 | 160 | 195 | 7.24 |
| | 40A | 40 | 140 | 105 | 4-19 | 16 | 180 | 210 | 9.12 |