



TECHNICAL DATA

GLOBE SCREW-DOWN CHECK VALVE BRONZE - 5K



Indicator

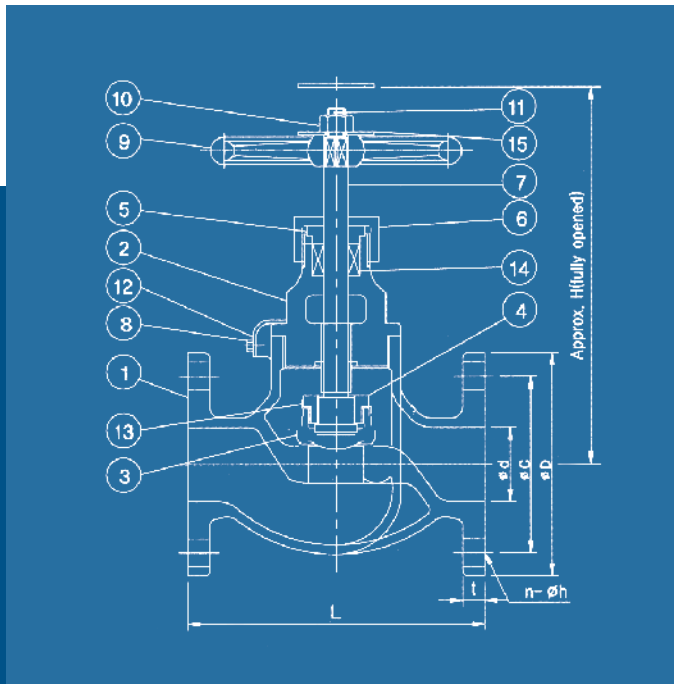

Screw Down Non Return (SDNR)

TECHNICAL FEATURES

- | | | |
|-----------|------------------|----------------|
| 1 | body | bronze |
| 2 | bonnet | bronze / brass |
| 3 | disc | bronze / brass |
| 4 | valve disc nut | brass |
| 5 | packing gland | brass |
| 6 | gland nut | brass |
| 7 | stem | brass |
| 8 | set screw | brass |
| 9 | handwheel | cast iron |
| 10 | hexagon nut | brass |
| 11 | split pin | brass |
| 12 | lock plate | brass |
| 13 | disc lock washer | brass |
| 14 | packing | non asbestos |
| 15 | washer | steel |
| 16 | indicator plate | brass |
| 17 | indicator piece | brass |

FLUID CONDITION & MAX. WORKING PRESSURE

Rating	Fluid Condition	JIS 5K
	Steam up to 205°C	0.49(5)
	Air, Gas, Oil and Pulsation Water	0.49(5)
	Non-shock water up to 120 °C	0.69(7)

DIMENSIONS

Rating	size (mm)	Ød (mm)	ØD (mm)	ØC (mm)	N-Øh (mm)	t (mm)	L (mm)	H (mm)	Weight (kg)
JIS 5K	15A	15	80	60	4-12	9	100	130	2.02
(JIS F7351)	20A	20	85	65	4-12	10	110	140	2.86
	25A	25	95	75	4-12	10	120	160	3.54
	32A	32	115	90	4-15	12	140	170	5.00
	40A	40	120	95	4-15	12	160	190	6.48
	50A	50	130	105	4-15	14	210	235	11.70
	65A	65	155	130	4-15	14	250	260	17.00