

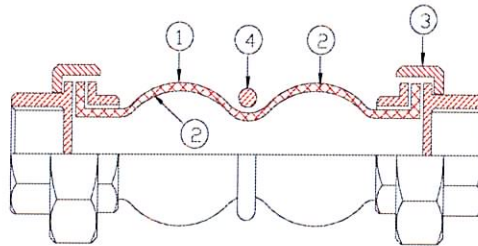







RUBBER EXPANSION JOINTS



STRUCTURE

Item#	Part	Materials
1	Body	EPDM Rubber
2	Reinforced	Nylon Tyre Cord
3	Coupling	Cast ductile Iron
4	Ring	Galvanized steel

Diam. DØ mm (in.)	L mm	Axial Compression	Axial Elongation	Transverse Deflection	Angular Deflection	Max. Pressure Bar - 20°C	Max. Temp. °C	Vacuum Rating mm Hg
25 (1/2)	200	22	6	22	45°	16	100	405
20 (3/4)	200	22	6	22	45°	16	100	405
25 (1)	200	22	6	22	45°	16	100	405
32 (1 1/4)	200	22	6	22	45°	16	100	405
40 (1 1/2)	200	22	6	22	45°	16	100	405
50 (2)	200	22	6	22	45°	16	100	405
65 (2 1/2)	240	22	6	22	45°	16	100	405
80 (3)	240	22	6	22	45°	16	100	405

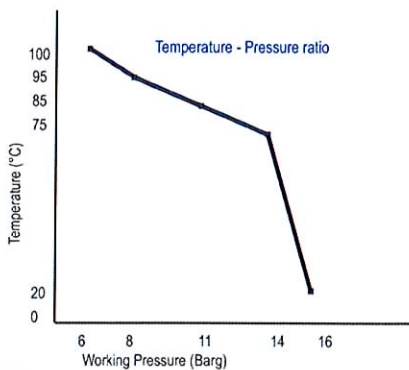

Remarks:

1. Applicable fluids: water, warm water, seawater, weak acids, alkalies etc...
2. BSP threaded unions.