

Description

Drain valve, a mechanical device with push-button operation. NBR sealing.

Specifications

Execution: Angled
 Connection type: Threaded male



Media


Fuel oil, lubricating oil and flammable hydraulic oil. Cargo oil. Non-flammable hydraulic fluid. Boiler feedwater, condensate. Seawater and freshwater.

Material

No.	Part	Material
1	Body	Stainless steel 1.4301 (AISI304)
2	Stem	Stainless steel 1.4301 (AISI304)
3	Knob	Stainless steel 1.4301 (AISI304)
4	Spring	Stainless steel 1.4310 (AISI301)
5	O-ring	NBR
6	O-ring	NBR
7	Drain pipe	Stainless steel 1.4436 (AISI316)

Max. working pressure (bar) at °C

DN	up to 80°C
15 - 32	16

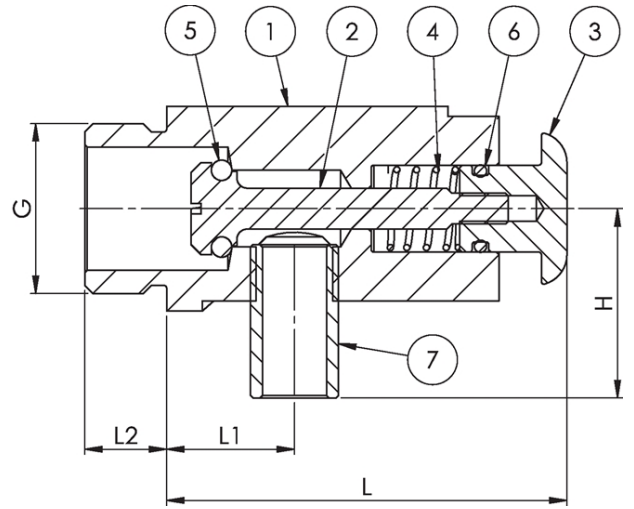

Items

DN	Item no.	Pressure rating	L	G (BSP)	L1	L2	H	Weight (kg)
15	33081	PN 16	73.5	G 1/2"	25	15	29.5	0.3
20	33082	PN 16	73.6	G 3/4"	25	15	31	0.4
25	33083	PN 16	78	G 1"	25	16	39	0.7
32	33084	PN 16	79	G 1 1/4"	25	16	45	1.1

All measurements in mm. Weights are approximations.

