

Description


Self closing flushing valve with manual operation. Straight with female screwed ends. PTFE sealing.

Specifications

Bonnet connection:	Screwed
Execution:	Straight
Connection type:	Threaded female

Media

Fuel oil, lubricating oil and flammable hydraulic oil. Seawater and freshwater.

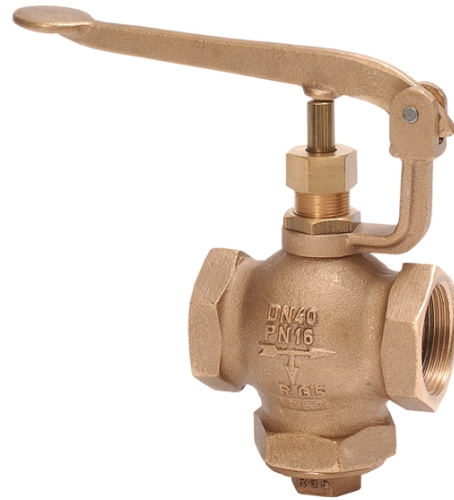


Material

No.	Part	Material
1	Body	Bronze CC491K (RG5)
2	Sealing	NBR bonded aramid
3	Lower part	Bronze CC491K (RG5)
4	Spring	Stainless steel 1.4301 (AISI304)
5	O-ring	NBR
6	Disc	Special brass CW710R (SoMs59)
7	Disc ring	PTFE
8	Stem	Special brass CW710R (SoMs59)
9	Gasket	NBR
10	Lever	Bronze CC491K (RG5)

Max. working pressure (bar) at °C

DN	up to 80°C
15 - 50	16

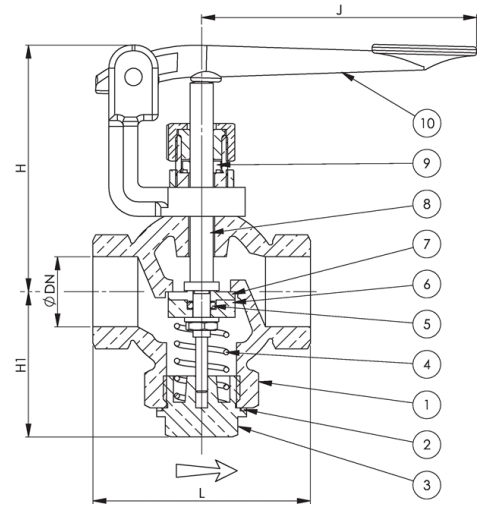

Items

DN	Item no.	Pressure rating	L	G (BSP)	H	H1	J	Weight (kg)	Color
15	81725	PN 16	65	G 1/2"	84	44	83	0.8	Unpainted
20	80245	PN 16	76	G 3/4"	87	51	83	1.0	Unpainted
25	80246	PN 16	80	G 1"	89	53	83	1.2	Unpainted
32	80247	PN 16	90	G 1 1/4"	107	60	155	2.2	Unpainted
40	80248	PN 16	102	G 1 1/2"	119	69	155	2.8	Unpainted
50	80833	PN 16	136	G 2"	135	85	155	4.5	Unpainted

All measurements in mm. Weights are approximations.

