


# TECHNICAL DATA

## GLOBE SCREW-DOWN CHECK VALVE CAST STEEL - 20K

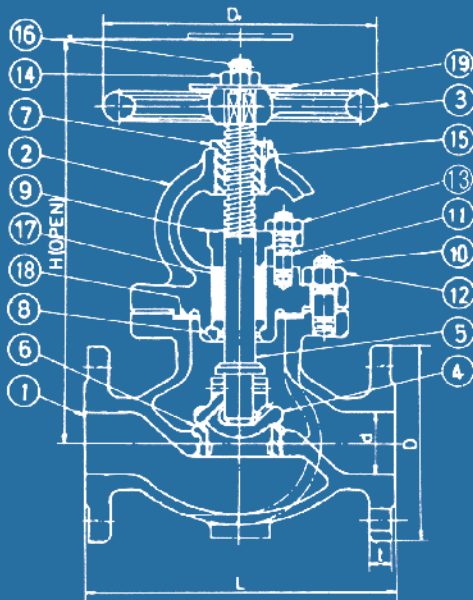

### TECHNICAL FEATURES

1	body	cast steel
2	bonnet	cast steel
3	handwheel	cast iron (below 150mm) cast steel (above 200mm)
4	disc	stainless steel
5	stem	stainless steel
6	seat ring	stainless steel
7	yoke bush	brass
8	packing ring	stainless steel
9	packing gland	bronze
10	bolt	carbon steel
11	bolt	rolled steel
12	nut	carbon steel
13	nut	rolled steel
14	nut	brass
15	set screw	rolled steel
16	split pin	brass wire
17	packing	teflon
18	gasket	non-asbestos
19	name plate	brass plate

### DIMENSIONS

Rating	size (mm)	H (mm)	D (mm)	D (mm)	D1 (mm)	T (mm)	L (mm)
JIS 20K	32A	265	135	32	160	18	190
(JIS F7473)	40A	280	140	40	160	18	200
	50A	295	155	50	200	18	230
	65A	330	175	65	224	20	270
	80A	370	200	80	250	22	300
	100A	420	225	100	280	24	350
	125A	475	270	125	315	26	430
	150A	525	305	150	355	28	500
	200A	605	350	200	455	30	560
	250A	700	430	250	560	34	660